OIPE JC48
NOV 28 2001
PATENT & TRADEMARK OFFICE

#4

Express Mail Label
No. EK708052348US

PATENTS
MIC-8

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

PATENT APPLICATION

Applicant	:	David F. Burrows
Application No.:		09/939,350 Confirmation No.: 3605
Filed	:	August 24, 2001
For	:	DATA COMPRESSION METHOD
Group Art Unit	:	2641

New York, New York 10020
November 28, 2001

Box MISSING PARTS
Hon. Commissioner for Patents
P.O. Box 2327
Arlington, Virginia 22202

SUBMISSION OF CERTIFIED
COPY OF PRIORITY DOCUMENT

Sir:

Pursuant to 37 C.F.R. § 1.55(a)(2), applicant hereby reiterates the claim, made in the declaration being submitted concurrently herewith, for priority under 35 U.S.C. § 119(a-d) from British Patent Application No. 0120302.5, filed August 21, 2001, and herewith submits a certified copy of that British patent application.

Respectfully submitted,

Jeffrey H. Ingerman
Reg. No. 31,069
Attorney for Applicant
FISH & NEAVE
Customer No. 1473
1251 Avenue of the Americas
New York, New York 10020-1105
Tel.: (212) 596-9000

OIPE
JC48
NOV 2 8 2001
PATENT & TRADEMARK OFFICE

The Patent Office
PATENTS • DESIGNS • COPYRIGHT • TRADE MARKS

INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

CERTIFIED COPY OF PRIORITY DOCUMENT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed Evans.

Dated 31 August 2001

Patents Form 1/77

Patents Act 1977
(Rule 16)

THE PATENT OFFICE
A
21 AUG 2001
RECEIVED BY FAX

The Patent Office

21AUG01 E654414-2 D02973
P01/7700 0.00-0120302.5

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

1. Your reference	CST/P71789GB
2. Patent application number *(The Patent Office will fill in this part)*	21 AUG 2001 **0120302.5**
3. Full name, address and postcode of the or of each applicant *(underline all surnames)*	Micron Technology Inc 8000 South Federal Way Boise, Idaho 83706-9632 United States of America
Patents ADP number *(if you know it)*	05933965003
If the applicant is a corporate body, give the country/state of its incorporation	Delaware, USA
4. Title of the invention	Data Compression Method
5. Name of your agent *(if you have one)*	Harrison Goddard Foote
"Address for service" in the United Kingdom to which all correspondence should be sent *(including the postcode)*	Tower House Merrion Way Leeds LS2 8PA
Patents ADP number *(if you know it)*	14571001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and *(if you know it)* the or each application number	Country	Priority application number *(if you know it)*	Date of filing *(day / month / year)*

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing *(day / month / year)*

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? *(Answer 'Yes' if:* *a) any applicant named in part 3 is not an inventor, or* *b) there is an inventor who is not named as an applicant, or* *c) any named applicant is a corporate body.* *See note (d))*	Yes

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form	
Description	13
Claim(s)	19
Abstract	1
Drawing(s)	5

SV

10. If you are also filing any of the following, state how many against each item.

Priority documents	
Translations of priority documents	
Statement of inventorship and right to grant of a patent *(Patents Form 7/77)*	Yes
Request for preliminary examination and search *(Patents Form 9/77)*	
Request for substantive examination *(Patents Form 10/77)*	
Any other documents *(please specify)*	

11. I/We request the grant of a patent on the basis of this application.

Signature [signature] Date 21-8-01

12. Name and daytime telephone number of person to contact in the United Kingdom Chris Tunstall 0113 290 1400

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

a) *If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*

b) *Write your answers in capital letters using black ink or you may type them.*

c) *If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*

d) *If you have answered 'Yes' Patents Form 7/77 will need to be filed.*

e) *Once you have filled in the form you must remember to sign and date it.*

f) *For details of the fee and ways to pay please contact the Patent Office.*

THE PATENT OFFICE
A
21 AUG 2001
RECEIVED BY FAX

Patents Form 7/77

Patents Act 1977
(Rule 15)

The Patent Office

Statement of inventorship and of right to grant of a patent

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

1. Your reference: CST/P71789GB

2. Patent application number *(if you know it)*: 0120302.5

   21 AUG 2001

3. Full name of the or of each applicant: Micron Technology Inc

4. Title of the invention: Data Compression Method

5. State how the applicant*(s)* derived the right from the inventor*(s)* to be granted a patent: By virtue an agreement between the applicants and the inventors employer

6. How many, if any, additional Patents Forms 7/77 are attached to this form? *(see note (c))*: None

7. I/We believe that the person*(s)* named over the page *(and on any extra copies of this form)* is/are the inventor*(s)* of the invention which the above patent application relates to.

   Signature: [signature]   Date: 21 August 2001

8. Name and daytime telephone number of person to contact in the United Kingdom: Chris Tunstall 0113 290 1400

Notes

a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.

b) Write your answers in capital letters using black ink or you may type them.

c) If there are more than three inventors, please write the names and addresses of the other inventors on the back of another Patents Form 7/77 and attach it to this form.

d) When an application does not declare any priority, or declares priority from an earlier UK application, you must provide enough copies of this form so that the Patent Office can send one to each inventor who is not an applicant.

e) Once you have filled in the form you must remember to sign and date it.

0014671 21-Aug-01 04:23

Patents Form 7/77

Enter the full names, addresses and postcodes of the inventors in the boxes and underline the surnames

BURROWS, David F
"Woodbury" 7 Quarter Mile Road
Godalming
Surrey
GU7 1TG
UK

Patents ADP number *(if you know it)*: 07100357001

Patents ADP number *(if you know it)*:

Patents ADP number *(if you know it)*:

Reminder

Have you signed the form?

0014671 21-Aug-01 04:23

MIC-8 (Great Britain)

DATA COMPRESSION METHOD

Background of the Invention

[0001] This invention relates to a method for compressing data. More particularly, this invention relates to a method for reducing the coding length of data that is transformed into components, where the recipient is more sensitive to one component than the other. Most particularly, this invention relates to reducing the coding length of data that have been subjected to Fourier transformation.

[0002] Many types of analog data are digitized for transmission and processing. As is well known, the digitized representations of such data more accurately reflect the original analog signal as the number of bits per sample increases. One example of such an analog signal is speech, which, particularly if being digitized for a purpose involving the reconstitution of an analog signal for playback to human listeners, ideally should be represented sufficiently accurately to be understandable and at least relatively undistorted at the listener's end.

[0003] The number of bits per sample required for suitable reproduction of, e.g., speech, is high, and

runs up against bandwidth and other constraints. Therefore, ways are commonly sought to compress the digital data.

[0004] Moreover, a common and useful way of digitizing and transmitting an analog waveform, such as that representing speech or another physical phenomenon, is to subject the signal to Fourier transformation, such as by using a Fast Fourier Transform. The resulting transformed data are particularly well suited to processing and transmission. However, this actually compounds the compression problem, because M digital samples of the original analog waveform generate 2M transform coefficients (i.e., an M-sampled signal S(n) is transformed into 2M paired I/Q Fourier transform coefficients I(n) and Q(n)), doubling the coding length of the data.

[0005] It is apparent then, that it would be desirable to be able to reduce the coding length of Fourier transformed data.

Summary of the Invention

[0006] In accordance with the present invention, the coding length of M-sampled Fourier transformed data is reduced from 2M by as much as almost half by converting the Fourier transform coefficients into data representing magniture, or amplitude, of the original analog signal, and data representing the phase of the original analog signal.

[0007] The amplitude data preferably are transmitted at least substantially in their entirety. However, instead of transmitting the phase data in their

entirety, a smaller number of bits is used to transmit the phase data. This could be done by quantizing the phase to a smaller number of values than the amplitude. A more extreme compression could be obtained by transmitting only a single bit indicating the phase difference between the current sample and a related sample such as the previous sample. The single bit preferably would indicate whether the phase is advanced or retarded by a fixed amount as compared to the related sample. The fixed amount would be determined in advance and would be "known" to the receiving apparatus for use in reconstructing the original signal.

[0008] The invention works for, e.g., speech, because empirical observation shows that human listeners are relatively insensitive to the phase of a speech waveform. The invention may also work for music, although a discerning listener may detect imperfections. The invention may further work for non-sound waveforms, depending on what aspect of the waveform is most sensitive to coding precision.

[0009] Thus, in accordance with the invention, there is provided a method for compressing data for transmission to a recipient. The method includes transforming the data into at least two components, where the recipient is tolerant of variations in one of the components. A compressed representation of that one component is transmitted. Preferably, the compressed representation is data representing the change of that component from a related sample, such as the previous sample.

Brief Description of the Drawings

[0010] The above and other objects and advantages of the invention will be apparent upon consideration of the following detailed description, taken in conjunction with the accompanying drawings, in which like reference characters refer to like parts throughout, and in which:

[0011] FIG. 1 is a time-domain representation of a speech waveform;

[0012] FIG. 2 is a time-domain representation of a speech waveform created by digitizing the waveform of FIG. 1, quantizing it in the frequency domain using 2,000,001 possible phase values for each sample, and reconverting it to the time domain;

[0013] FIG. 3 is a time-domain representation of the difference (i.e., error) between the representation of FIG. 2 and the representation of FIG. 1;

[0014] FIG. 4 is a time-domain representation of a speech waveform created by digitizing the waveform of FIG. 1, quantizing it in the frequency domain using 15 possible phase values for each sample, and reconverting it to the time domain; and

[0015] FIG. 5 is a time-domain representation of the difference (i.e., error) between the representation of FIG. 4 and the representation of FIG. 1.

Detailed Description of the Invention

[0016] Empirical observation has shown that a human listener is relatively insensitive to phase errors during the playback of electronically processed speech signals. Therefore, in accordance with the present

invention, speech signals that have been processed electronically, particularly those that have been transformed into a format that actually increases the amount of data to be transmitted or played back, can be compressed with little perceivable loss in quality by reducing the amount of phase data that are transmitted or played back. Although the invention is described with respect to phase, similar compression might be achieved by reducing the amount of data representing any component with respect to which a recipient is tolerant of, or less sensitive to, variations. Moreover, while the invention is described with respect to speech, other audio data, and even other analog non-audio data such as seismic activity recordings, that can be resolved into components, to variations in one of which the recipient is relatively insensitive, can be compressed in accordance with the invention.

[0017] In a preferred embodiment of the invention, a speech waveform is digitized by an analog-to-digital converter, preferably with 16-bit accuracy, preferably at a sample rate of 8 kHz -- i.e., 8,000 16-bit samples preferably are collected each second, for a data rate in this preferred embodiment of 128,000 bits per second. These digitized speech data S(n) preferably are converted to the frequency domain through Fourier transformation, preferably using a Fast Fourier Transform. As a result, each 16-bit sample becomes two 16-bit Fourier transform coefficients I(n) and Q(n) -- i.e., there are 16,000 16-bit coefficients, for a data rate of 256,000 bits per second in this preferred embodiment.

[0018] The coefficients are then converted into magnitude, or amplitude, R(n) and phase P(n), as follows:

[0019] $R(n) = ((I(n))^2 + (Q(n))^2)^{0.5}$

[0020] $P(n) = \tan^{-1}(I(n)/Q(n))$

[0021] The amplitude signal R(n) preferably is transmitted at least substantially in its entirety (i.e., at 128,000 bits per second in this embodiment). However, the phase signal P(n) preferably is compressed as described below.

[0022] Broadly considered, in accordance with the present invention, the phase signal P(n) is coarsely coded. For example, instead of transmitting sixteen bits per sample, only four bits per sample might be sent, and one method for deriving the four-bit values will be described below. Similarly, eight bits, or two bits, or any other number of bits fewer than sixteen bits could also be used to coarsely code the phase data. In the extreme as mentioned above, only one bit could be sent, indicating advance or retardation of the phase from a related sample, such as the previous sample. This method also will be discussed below.

[0023] In a first example, the spoken word "hello" was recorded as a .WAV file. The original waveform 10 is plotted in FIG. 1 as a function of the amplitude (in volts) versus time (as represented by the sample number). The .WAV file was then processed, using the MATLAB® Signal Processing Toolbox signal analysis utility available from The MathWorks, Inc., of Natick, Massachusetts, as follows:

[0024] First, the .WAV file was read into an array. Second, the time domain data in the array were

converted to the frequency domain, in rectangular or Cartesian coordinates, using a Fast Fourier Transform. Next, the Cartesian frequency domain data were converted to polar coordinates, where the radius represented the magniture or amplitude, and the angle, ranging from $-\pi$ to $+\pi$, represented the phase. The amplitude was transmitted with full precision.

[0025] Each phase sample was then quantized to one of a plurality of discrete values by selecting an integer N, normalizing the value of the phase sample to between -1 and +1 by dividing it by π, multiplying the normalized phase value by N, rounding the product to the nearest integer, dividing the rounded product by N and finally multiplying by π.

[0026] It will be appreciated that the rounded product of N and the normalized phase is an integer between -N and +N, which can have 2N+1 possible values (-N, ... , -2, -1, 0, 1, 2, ... , N). Dividing each of that many possible values by N and multiplying by π will not change the number of possible values. Therefore, the final result is that each phase sample is quantized to one of 2N+1 values. It will further be appreciated that the accuracy of the representation of the phase data by the quantization values increases as N increases.

[0027] Quantization was tried with N=1,000,000 (2,000,001 possible quantization values) and N=7 (15 possible quantization values). In each case the result, along with the full-precision amplitude data, was converted back to the time domain using an inverse

Fast Fourier Transform, to produce a .WAV file that could be played back.

[0028] The resulting waveform 20 for the case where N=1,000,000 is plotted in FIG. 2 as a function of amplitude (in volts) versus time (as represented by the sample number). Visual comparison reveals that waveform 20 of FIG. 2 is virtually indistinguishable from original waveform 10 of FIG. 1. Empirically, it was observed upon playing back of the two .WAV files that to a human listener they were aurally indistinguishable as well. Indeed, the error 30 between waveform 20 and waveform 10, obtained by subtraction, is shown in FIG. 3, and has a maximum value of $8x10^{-7}$ volts.

[0029] The resulting waveform 40 for the case where N=7 is plotted in FIG. 4 as a function of amplitude (in volts) versus time (as represented by the sample number). Visual comparison reveals that waveform 40 of FIG. 4 is similar to original waveform 10 of FIG. 1, but not so indistinguishable from waveform 10 as, e.g., waveform 20 was. Indeed, the error 50 between waveform 40 and waveform 10, obtained by subtraction, is shown in FIG. 5, and has a maximum value of close to 0.1 volts, or about 10% of the original signal. Nevertheless, it was observed empirically upon playing back of the resulting .WAV file that it sounded to a human listener virtually identical to the .WAV file represented by waveform 10.

[0030] Significantly, storage or transmission of the full precision Fourier-transformed signal typically would require 32 bits (16 bits for each of I(n), Q(n) or R(n), P(n) signal pairs). On the other hand,

storage or transmission of waveform 40, which empirically sounds the same, would require only 20 bits (16 bits for R(n) and 4 bits for (P(n)).

[0031] In a second example, the spoken word "hello" again is recorded as a .WAV file (FIG. 1). The .WAV file is then processed, using the MATLAB® Signal Processing Toolbox signal analysis utility, as follows:

[0032] First, the .WAV file is read into an array as before. Second, as before, the time domain data in the array are converted to the frequency domain, in rectangular or Cartesian coordinates, using a Fast Fourier Transform. Next, the Cartesian frequency domain data are converted to polar coordinates, where, as above, the radius represents amplitude, and the angle represents phase. The amplitude is transmitted with full precision.

[0033] With respect to the phase, the value of the first (reference) sample preferably is set to zero. Thereafter, for each subsequent sample, a single bit preferably is transmitted, indicating whether the phase is advanced or retarded by some preferably fixed amount as compared to a related sample, which could be the previous sample, the next sample or another subsequent sample, the same sample in a previous or subsequent block of speech, or a sample related in some other predetermined way to the current sample. For example, a "1" could indicate that the phase is advanced while a "0" could indicate that the phase is retarded, or vice-versa. In a case where there is no change in the phase over several samples, the phase bits alternate between "1" and "0", alternately advancing and retarding the

phase by the same amount, so that on average there is no phase change.

[0034] The value of the "fixed amount" of phase change is determined empirically and "made known" in advance to the receiving/playback apparatus. The value must be small enough to produce acceptable fidelity (i.e., the value cannot be so large that the system does not register phase changes), but large enough to allow the system to respond (i.e., given that the value is fixed, the value cannot be so small that when a change is registered, the output change is insufficient to approximate the real change).

[0035] On the one hand, there is the question of how much of a phase change there has to be before the system reacts. On the other hand, if the system is to react, and is going to react by a fixed amount, then that fixed amount has to be some substantial portion of the full excursion of the phase data between the maximum and minimum phase values for the entire waveform. This requires knowing the likely maximum difference between phase samples. Depending on the system design, it may be that there is some known correlation between frequency samples. If so, it may be possible to select the same frequency sample from successive blocks of speech and encode only the difference in phase between them. Thus the invention likely would not work well for signals where there is little or no correlation between samples and the phase could assume any value from one sample to the next.

[0036] Another possibility may be to accumulate or "batch up" phase changes without transmitting them, either for a predetermined number of samples (e.g.,

data representing any component to variations in which

covering 20 ms of speech data), or until the predetermined fixed amount is reached, and then to transmit the one or a few bits indicating that there is an increase or decrease of that amount (or no change if after a predetermined number of samples there is no net change).

[0037] If necessary, more than one bit could be used, to indicate by how many of the fixed increments the phase has changed. If one bit is used, the entire signal could be transmitted in this example using 17 bits instead of 32 bits, for a reduction by almost half of the full coding length. Generally speaking, the maximum expected difference between two phase values must be encodable by the largest value of the phase sample signal (which is a function of the number of bits used and the value of the increment the multiple of which they represent).

[0038] Any other compression scheme that takes advantage of listeners' relative insensitivity to phase variations in speech, or possibly other types of audio waveforms such as music, can be used. Similarly, if waveform data or any other type of data, such as seismic activity recordings, can be broken down into two or more components, where the recipient of the data is relatively tolerant of, or insensitive to, variations in one of those components, then in accordance with the invention, the data can be compressed by more coarsely coding that component to variations of which there is less sensitivity.

[0039] It should be noted that although the discussion above indicates that the amplitude data, or data representing any component to variations in which

a recipient would be sensitive, is transmitted with full precision, or with at least substantially full precision, that is not meant to exclude the possibility that any data compressed by the method according to this invention might be further compressed by one of the well known general compression schemes commonly in use, such as MP3. Thus, in the speech examples set forth above, the output of the method according to this invention would be a full-precision (or substantially full-precision) amplitude signal and a compressed phase signal. That output could subsequently be subjected to one of the aforementioned general compression schemes as well.

[0040] At the receiving end, a signal compressed according to the present invention would be simply played back if compressed according to the first example, or, if compressed according to the second example, subject to reconstruction by advancing or retarding the phase for each sample as indicated by the compressed data, and then played back. If one of the aforementioned general compression schemes is used on the output of the method of this invention, then at the receiving end, the corresponding decompression scheme would be used first, and then the signal output by the present invention would be played back as just described.

[0041] Thus it is seen that the coding length of digitized data, particularly Fourier-transformed data, and particularly such data representing speech, can be decreased by up to almost half in accordance with the present invention. One skilled in the art will appreciate that the present invention can be practiced

by other than the described embodiments, which are presented for purposes of illustration and not of limitation, and the present invention is limited only by the claims which follow.

WHAT IS CLAIMED IS:

1. A method for compressing data for transmission to a recipient, said method comprising:

transforming said data into at least two components, said recipient tolerant of variations in one of said components; and

transmitting a compressed representation of said one of said components.

2. The method of claim 1 wherein said compressed representation indicates a relative value of a current sample of said one of said components as compared to a related sample of said one of said components.

3. The method of claim 2 wherein said related sample is a previous sample.

4. The method of claim 2 wherein said previous sample is an immediately preceding sample.

5. The method of claim 4 wherein said relative value is one of (a) no change, (b) an increase by a predetermined increment, and (c) a decrease by said predetermined increment.

6. The method of claim 5 wherein said relative value is represented by one bit.

7. The method of claim 6 wherein said one of said components is phase.

8. The method of claim 7 wherein said transforming comprises applying a Fourier transformation.

9. The method of claim 8 wherein said data represent sound.

10. The method of claim 9 wherein said sound is speech.

11. The method of claim 7 wherein said data represent sound.

12. The method of claim 11 wherein said sound is speech.

13. The method of claim 2 wherein said related sample is a subsequent sample.

14. The method of claim 13 wherein said relative value is one of (a) no change, (b) an increase by a predetermined increment, and (c) a decrease by said predetermined increment.

15. The method of claim 14 wherein said relative value is represented by one bit.

16. The method of claim 15 wherein said one of said components is phase.

17. The method of claim 16 wherein said transforming comprises applying a Fourier transformation.

18. The method of claim 17 wherein said data represent sound.

19. The method of claim 18 wherein said sound is speech.

20. The method of claim 16 wherein said data represent sound.

21. The method of claim 20 wherein said sound is speech.

22. The method of claim 3 wherein said relative value is one of (a) no change, (b) an increase by a predetermined increment, and (c) a decrease by said predetermined increment.

23. The method of claim 22 wherein said relative value is represented by one bit.

24. The method of claim 23 wherein said one of said components comprises phase.

25. The method of claim 24 wherein said transforming comprises applying a Fourier transformation.

26. The method of claim 25 wherein said data represent sound.

27. The method of claim 26 wherein said sound is speech.

28. The method of claim 24 wherein said data represent sound.

29. The method of claim 28 wherein said sound is speech.

30. The method of claim 2 wherein said relative value is one of (a) no change, (b) an increase by a predetermined increment, and (c) a decrease by said predetermined increment.

31. The method of claim 30 wherein said relative value is represented by one bit.

32. The method of claim 31 wherein said one of said components comprises phase.

33. The method of claim 32 wherein said transforming comprises applying a Fourier transformation.

34. The method of claim 33 wherein said data represent sound.

35. The method of claim 34 wherein said sound is speech.

36. The method of claim 32 wherein said data represent sound.

37. The method of claim 36 wherein said sound is speech.

38. The method of claim 1 wherein said one of said components comprises phase.

39. The method of claim 38 wherein said transforming comprises applying a Fourier transformation.

40. The method of claim 39 wherein said data represent sound.

41. The method of claim 40 wherein said sound is speech.

42. The method of claim 38 wherein said data represent sound.

43. The method of claim 42 wherein said sound is speech.

44. The method of claim 1 wherein said transforming comprises applying a Fourier transformation.

45. The method of claim 44 wherein said data represent sound.

46. The method of claim 45 wherein said sound is speech.

47. The method of claim 1 wherein:

said recipient is sensitive to variations in another of said components; and

said method further comprises:

transmitting said another of said components at least substantially in its entirety.

48. The method of claim 47 wherein said one of said components is phase.

49. The method of claim 48 wherein said another of said components comprises amplitude.

50. The method of claim 49 wherein said compressed representation indicates a relative value of a current sample of said one of said components as compared to a related sample of said one of said components.

51. The method of claim 50 wherein said related sample is a subsequent sample.

52. The method of claim 51 wherein said relative value is one of (a) no change, (b) an increase by a predetermined increment, and (c) a decrease by said predetermined increment.

53. The method of claim 52 wherein said relative value is represented by one bit.

54. The method of claim 53 wherein said one of said components is phase.

55. The method of claim 54 wherein said transforming comprises applying a Fourier transformation.

56. The method of claim 55 wherein said data represent sound.

57. The method of claim 56 wherein said sound is speech.

58. The method of claim 54 wherein said data represent sound.

59. The method of claim 58 wherein said sound is speech.

60. The method of claim 50 wherein said related sample is a previous sample.

61. The method of claim 60 wherein said previous sample is an immediately preceding sample.

62. The method of claim 61 wherein said relative value is one of (a) no change, (b) an increase by a predetermined increment, and (c) a decrease by said predetermined increment.

63. The method of claim 62 wherein said relative value is represented by one bit.

64. The method of claim 63 wherein said transforming comprises applying a Fourier transformation.

65. The method of claim 63 wherein said data represent sound.

66. The method of claim 65 wherein said sound is speech.

67. The method of claim 64 wherein said data represent sound.

68. The method of claim 67 wherein said sound is speech.

69. The method of claim 60 wherein said relative value is one of (a) no change, (b) an increase by a predetermined increment, and (c) a decrease by said predetermined increment.

70. The method of claim 69 wherein said relative value is represented by one bit.

71. The method of claim 70 wherein said transforming comprises applying a Fourier transformation.

72. The method of claim 71 wherein said data represent sound.

73. The method of claim 72 wherein said sound is speech.

74. The method of claim 70 wherein said data represent sound.

75. The method of claim 74 wherein said sound is speech.

76. The method of claim 50 wherein said relative value is one of (a) no change, (b) an increase by a predetermined increment, and (c) a decrease by said predetermined increment.

77. The method of claim 76 wherein said relative value is represented by one bit.

78. The method of claim 77 wherein said transforming comprises applying a Fourier transformation.

79. The method of claim 78 wherein said data represent sound.

80. The method of claim 79 wherein said sound is speech.

81. The method of claim 78 wherein said data represent sound.

82. The method of claim 81 wherein said sound is speech.

83. The method of claim 49 wherein said transforming comprises applying a Fourier transformation.

84. The method of claim 83 wherein said data represent sound.

85. The method of claim 84 wherein said sound is speech.

86. The method of claim 83 wherein:

said one of said components is represented by a first number of bits; and

said another of said components is represented by a second number of bits greater than said first number of bits.

87. The method of claim 86 wherein said first number of bits is one.

88. The method of claim 48 wherein said transforming comprises applying a Fourier transformation.

89. The method of claim 88 wherein said data represent sound.

90. The method of claim 89 wherein said sound is speech.

91. The method of claim 88 wherein:

said one of said components is represented by a first number of bits; and

said another of said components is represented by a second number of bits greater than said first number of bits.

92. The method of claim 91 wherein said first number of bits is one.

93. The method of claim 48 wherein said compressed representation indicates a relative value of a current sample of said one of said components as compared to a related sample of said one of said components.

94. The method of claim 93 wherein said previous sample is an immediately preceding sample.

95. The method of claim 94 wherein said relative value is one of (a) no change, (b) an increase by a predetermined increment, and (c) a decrease by said predetermined increment.

96. The method of claim 95 wherein said relative value is represented by one bit.

97. The method of claim 96 wherein said one of said components is phase.

98. The method of claim 97 wherein said transforming comprises applying a Fourier transformation.

99. The method of claim 98 wherein said data represent sound.

100. The method of claim 99 wherein said sound is speech.

101. The method of claim 97 wherein said data represent sound.

102. The method of claim 101 wherein said sound is speech.

103. The method of claim 93 wherein said related sample is a previous sample.

104. The method of claim 103 wherein said previous sample is an immediately preceding sample.

105. The method of claim 104 wherein said relative value is one of (a) no change, (b) an increase by a predetermined increment, and (c) a decrease by said predetermined increment.

106. The method of claim 105 wherein said relative value is represented by one bit.

107. The method of claim 106 wherein said transforming comprises applying a Fourier transformation.

108. The method of claim 107 wherein said data represent sound.

109. The method of claim 108 wherein said sound is speech.

110. The method of claim 106 wherein said data represent sound.

111. The method of claim 110 wherein said sound is speech.

112. The method of claim 103 wherein said relative value is one of (a) no change, (b) an increase by a predetermined increment, and (c) a decrease by said predetermined increment.

113. The method of claim 112 wherein said relative value is represented by one bit.

114. The method of claim 113 wherein said transforming comprises applying a Fourier transformation.

115. The method of claim 114 wherein said data represent sound.

116. The method of claim 115 wherein said sound is speech.

117. The method of claim 113 wherein said data represent sound.

118. The method of claim 117 wherein said sound is speech.

119. The method of claim 93 wherein said relative value is one of (a) no change, (b) an increase by a predetermined increment, and (c) a decrease by said predetermined increment.

120. The method of claim 119 wherein said relative value is represented by one bit.

121. The method of claim 120 wherein said transforming comprises applying a Fourier transformation.

122. The method of claim 121 wherein said data represent sound.

123. The method of claim 122 wherein said sound is speech.

124. The method of claim 120 wherein said data represent sound.

125. The method of claim 124 wherein said sound is speech.

126. The method of claim 47 wherein said compressed representation indicates a relative value of a current sample of said one of said components as compared to a related sample of said one of said components.

127. The method of claim 126 wherein said related sample is a subsequent sample.

128. The method of claim 127 wherein said relative value is one of (a) no change, (b) an increase by a predetermined increment, and (c) a decrease by said predetermined increment.

129. The method of claim 128 wherein said relative value is represented by one bit.

130. The method of claim 129 wherein said one of said components is phase.

131. The method of claim 130 wherein said transforming comprises applying a Fourier transformation.

132. The method of claim 131 wherein said data represent sound.

133. The method of claim 132 wherein said sound is speech.

134. The method of claim 130 wherein said data represent sound.

135. The method of claim 134 wherein said sound is speech.

136. The method of claim 126 wherein said related sample is a previous sample.

137. The method of claim 136 wherein said previous sample is an immediately preceding sample.

138. The method of claim 137 wherein said relative value is one of (a) no change, (b) an increase by a predetermined increment, and (c) a decrease by said predetermined increment.

139. The method of claim 138 wherein said relative value is represented by one bit.

140. The method of claim 139 wherein said transforming comprises applying a Fourier transformation.

141. The method of claim 140 wherein said data represent sound.

142. The method of claim 141 wherein said sound is speech.

143. The method of claim 139 wherein said data represent sound.

144. The method of claim 143 wherein said sound is speech.

145. The method of claim 136 wherein said relative value is one of (a) no change, (b) an increase by a predetermined increment, and (c) a decrease by said predetermined increment.

146. The method of claim 145 wherein said relative value is represented by one bit.

147. The method of claim 146 wherein said transforming comprises applying a Fourier transformation.

148. The method of claim 147 wherein said data represent sound.

149. The method of claim 148 wherein said sound is speech.

150. The method of claim 146 wherein said data represent sound.

151. The method of claim 150 wherein said sound is speech.

152. The method of claim 126 wherein said relative value is one of (a) no change, (b) an increase by a predetermined increment, and (c) a decrease by said predetermined increment.

153. The method of claim 152 wherein said relative value is represented by one bit.

154. The method of claim 153 wherein said transforming comprises applying a Fourier transformation.

155. The method of claim 154 wherein said data represent sound.

156. The method of claim 155 wherein said sound is speech.

157. The method of claim 153 wherein said data represent sound.

158. The method of claim 157 wherein said sound is speech.

159. The method of claim 47 wherein said transforming comprises applying a Fourier transformation.

160. The method of claim 159 wherein said data represent sound.

161. The method of claim 160 wherein said sound is speech.

162. The method of claim 159 wherein:

said one of said components is represented by a first number of bits; and

said another of said components is represented by a second number of bits greater than said first number of bits.

163. The method of claim 162 wherein said first number of bits is one.

164. The method of claim 47 wherein:

said one of said components is represented by a first number of bits; and

said another of said components is represented by a second number of bits greater than said first number of bits.

165. The method of claim 164 wherein said first number of bits is one.

166. A method of compressing primary data and transmitting the compressed data to a recipient, said method comprising:

converting said primary data into secondary data,

said secondary data representing at least two components,

said recipient relatively tolerant of variations in one of said components as compared with variations in another of said components,

said secondary data representing said one of said components being a relatively compressed representation as compared with said secondary data representing said other of said components; and

transmitting said secondary data to said recipient.

DATA COMPRESSION METHOD

Abstract of the Disclosure

A method of data compression coarsely codes components of data to be transmitted or processed where the ultimate recipient of those data are relatively insensitive to, or tolerant of, variations in that component. Thus, in data representing speech, the phase component, e.g., is more coarsely coded than, e.g., the amplitude component. In an extreme embodiment, the phase component may be coded by only one bit per sample, where that bit indicates whether the phase is advanced or retarded relative to a related sample, such as a previous or subsequent sample, while the amplitude may be coded by, e.g., 16 bits.

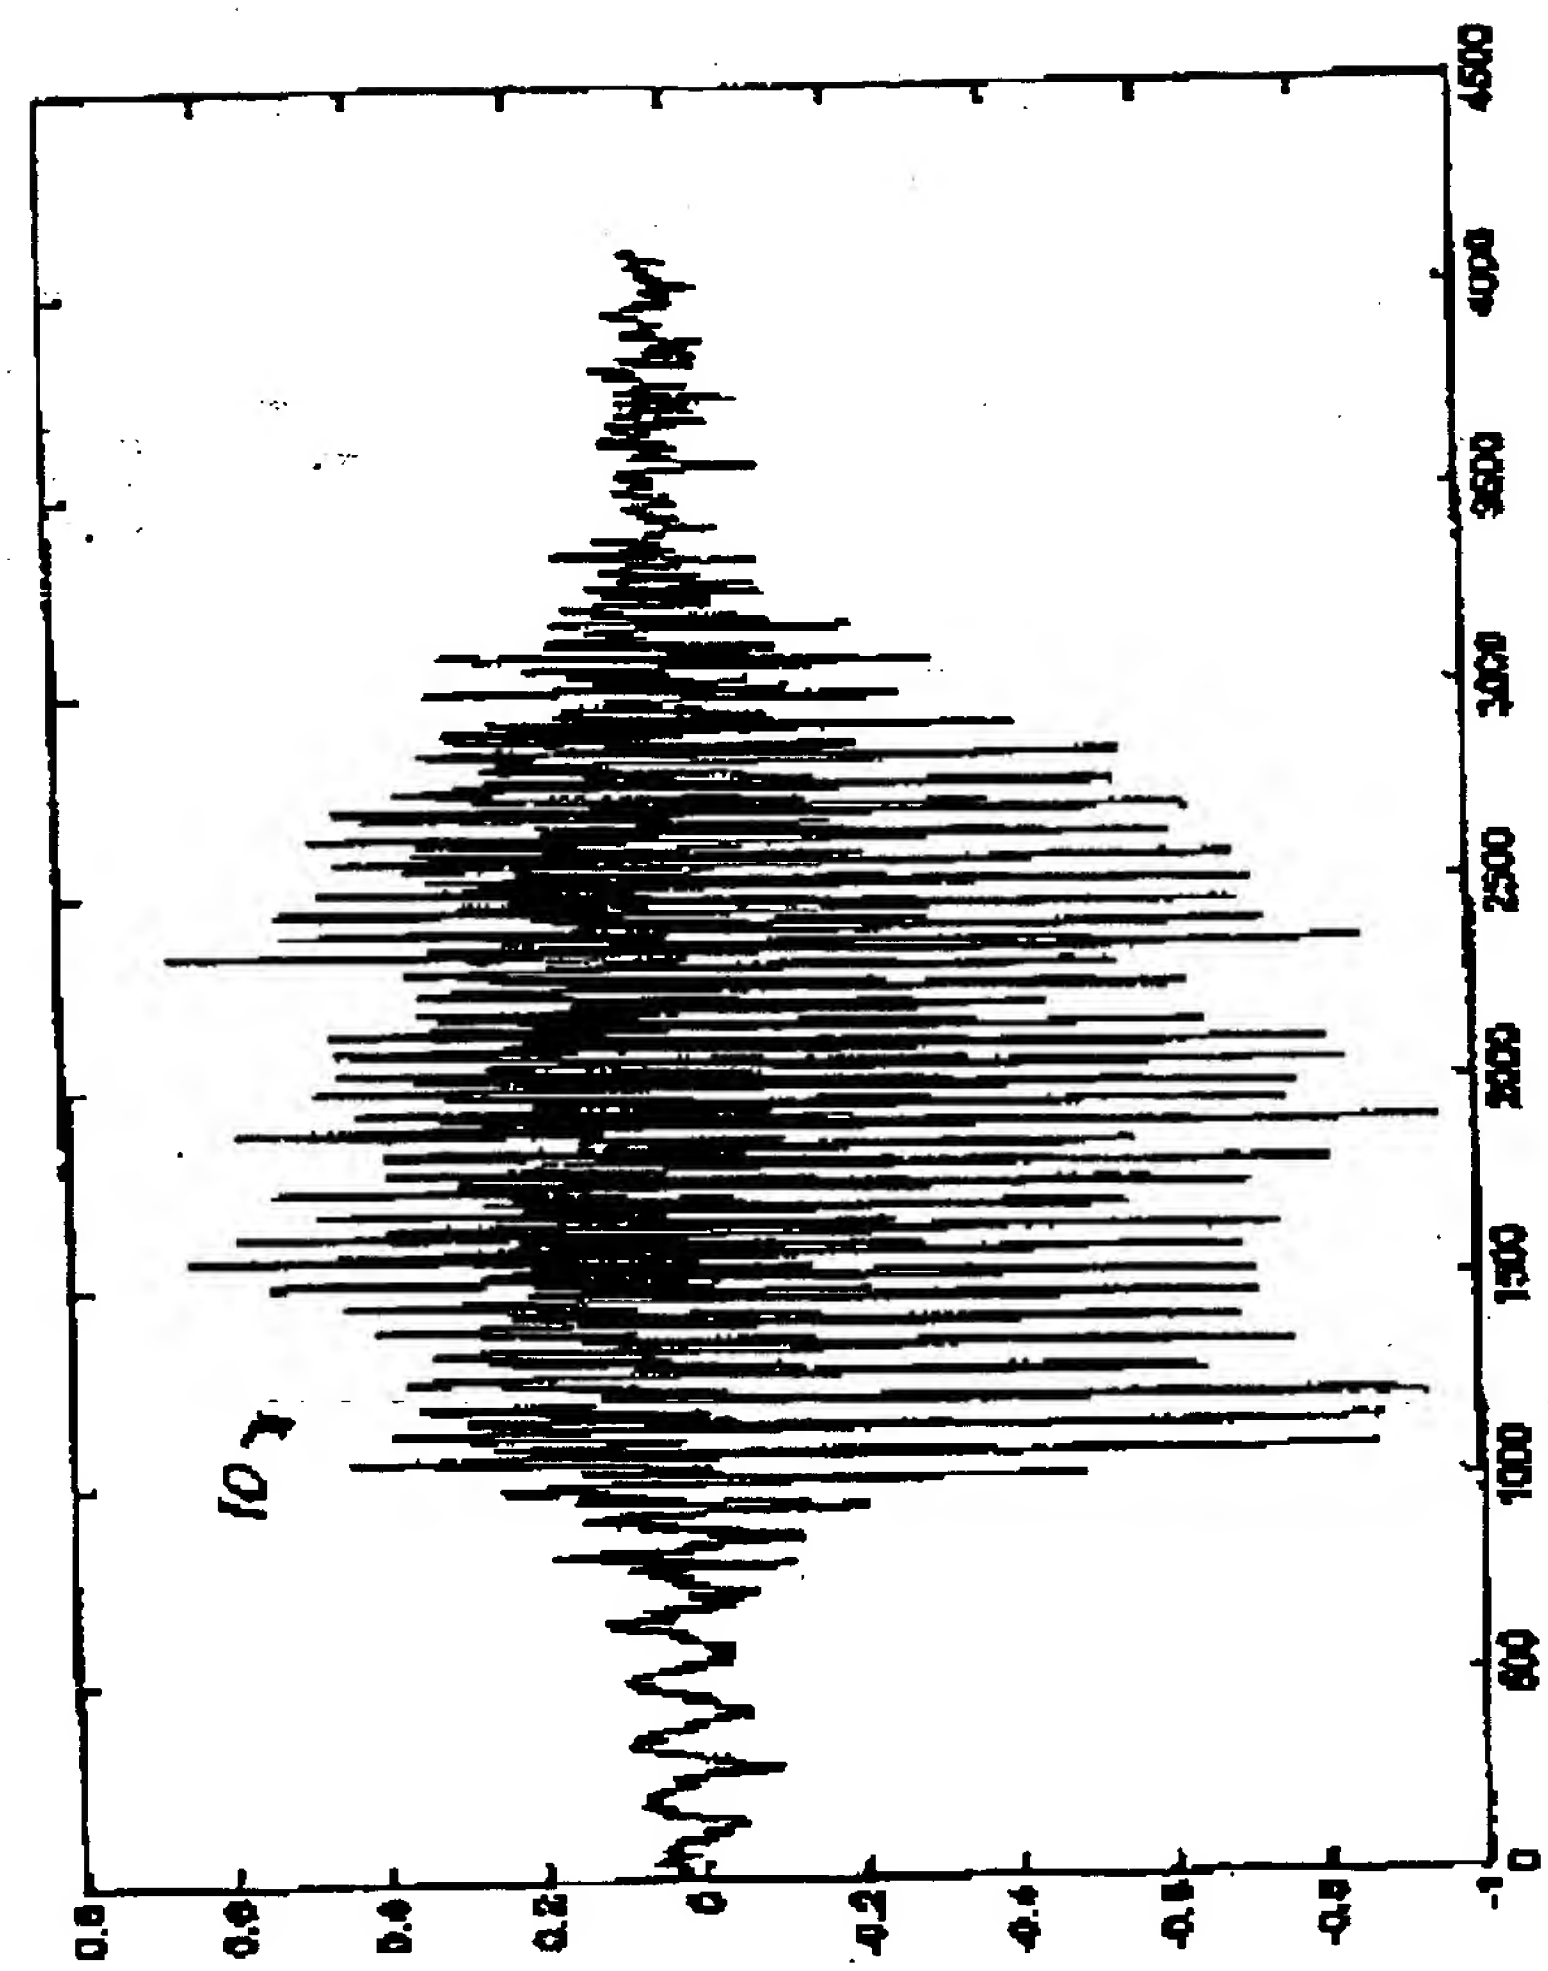
10
0
500
1000
1500
2000
2500
3000
3500
4000
4500
0.8
0.6
0.4
0.2
0
-0.2
-0.4
-0.6
-0.8
-1

FIG. 1

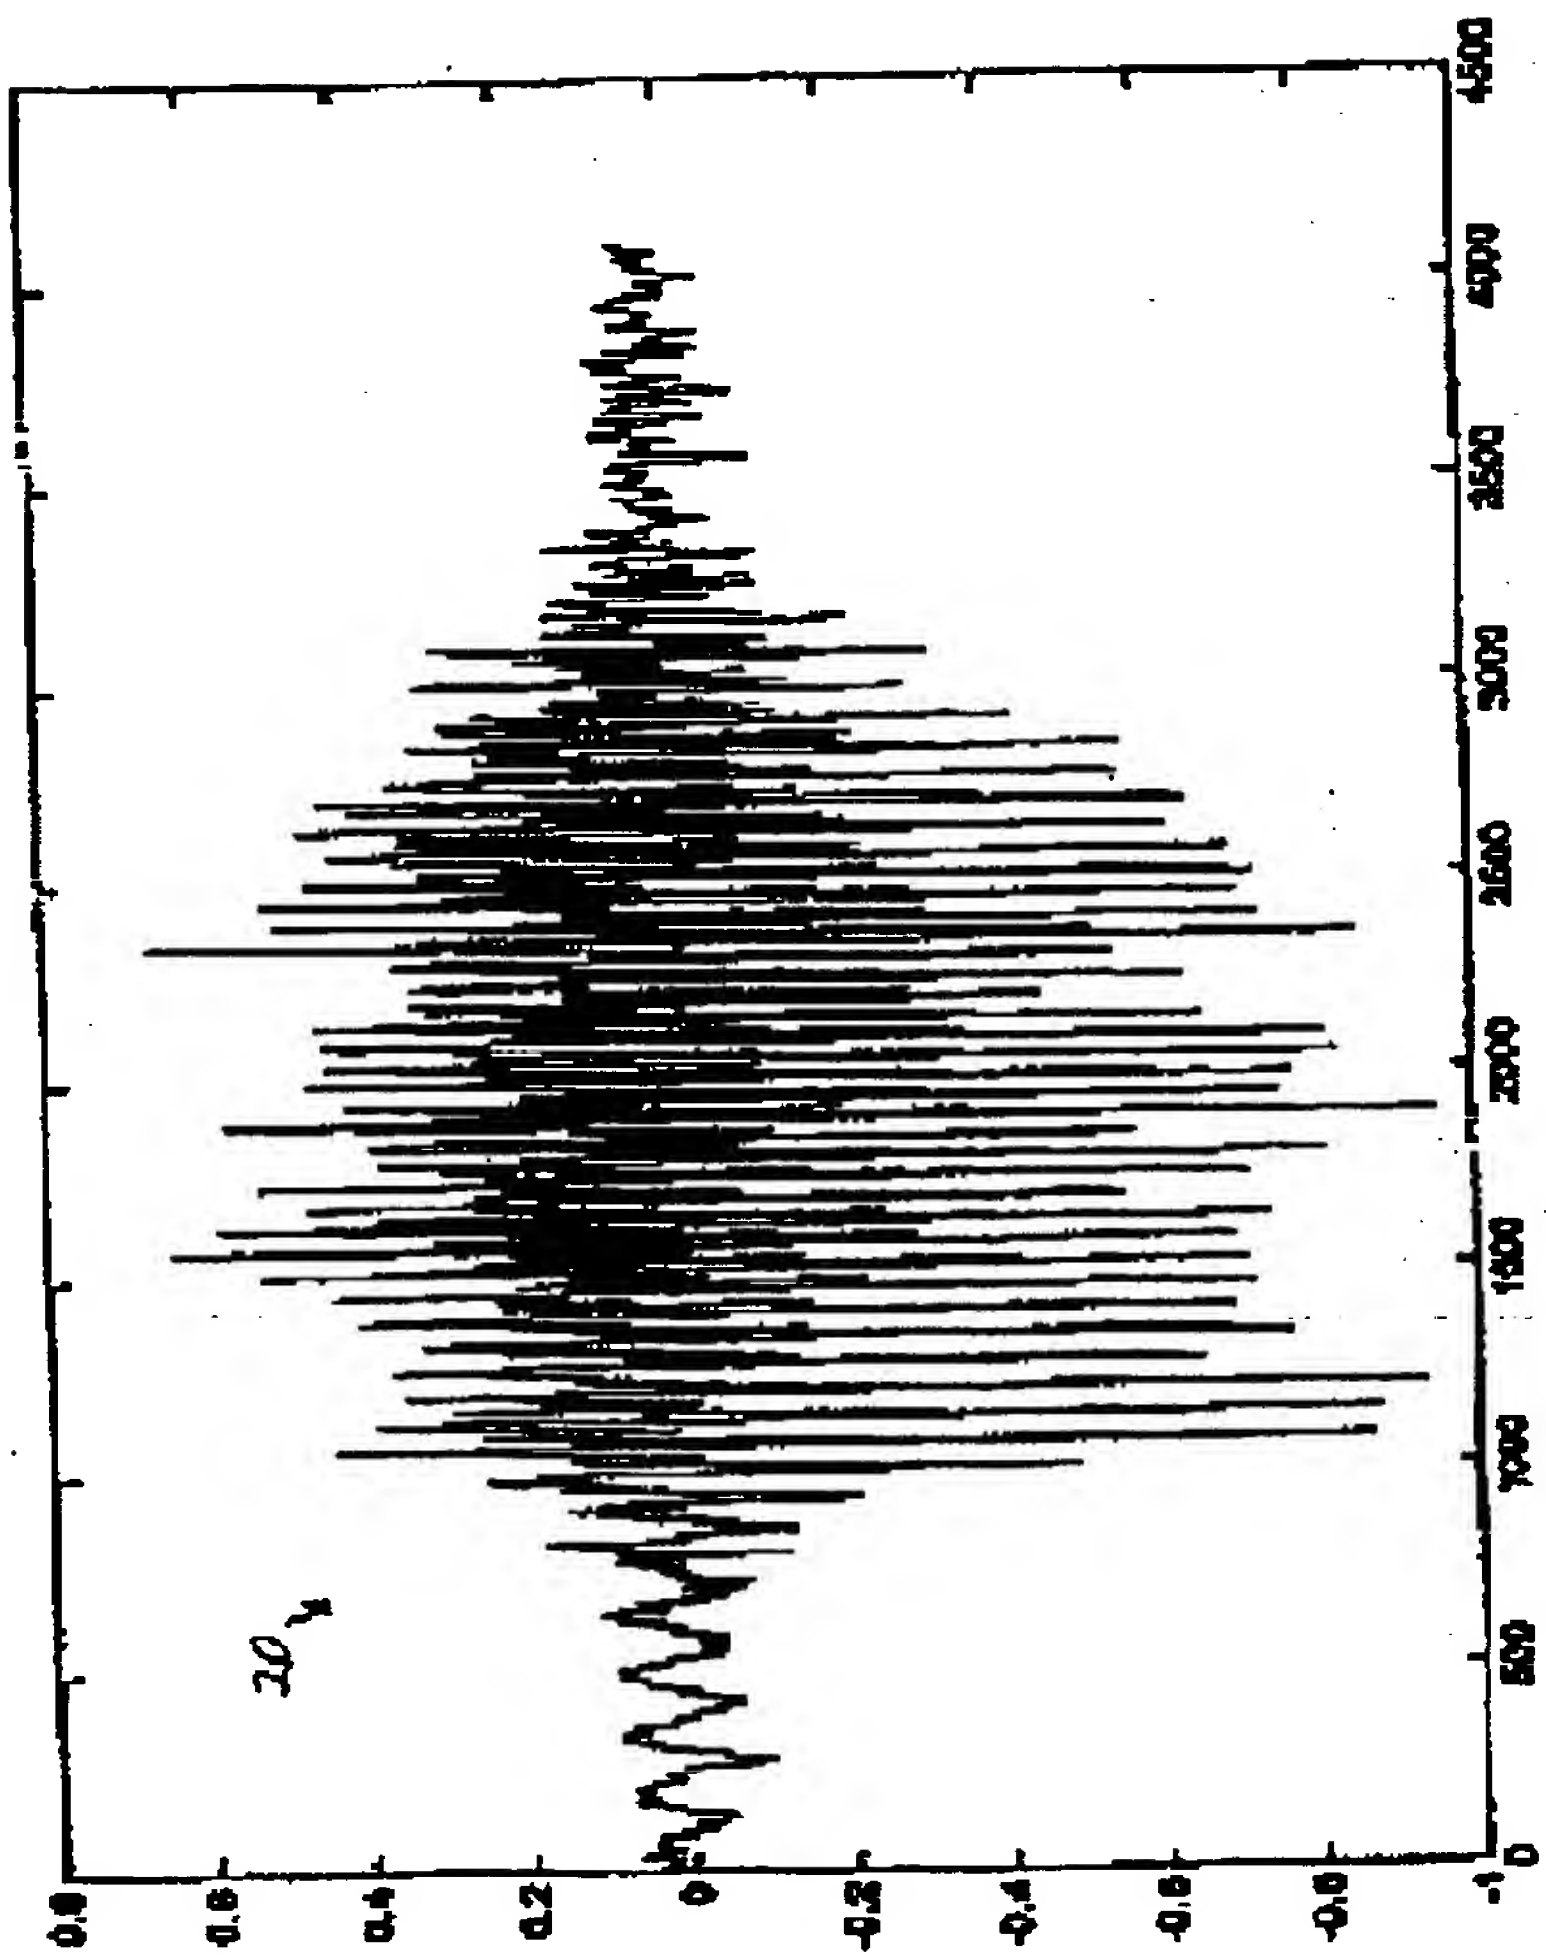

0.8
0.6
0.4
0.2
0
-0.2
-0.4
-0.6
-0.8
-1
0
500
1000
1500
2000
2500
3000
3500
4000
4500
20

FIG. 2

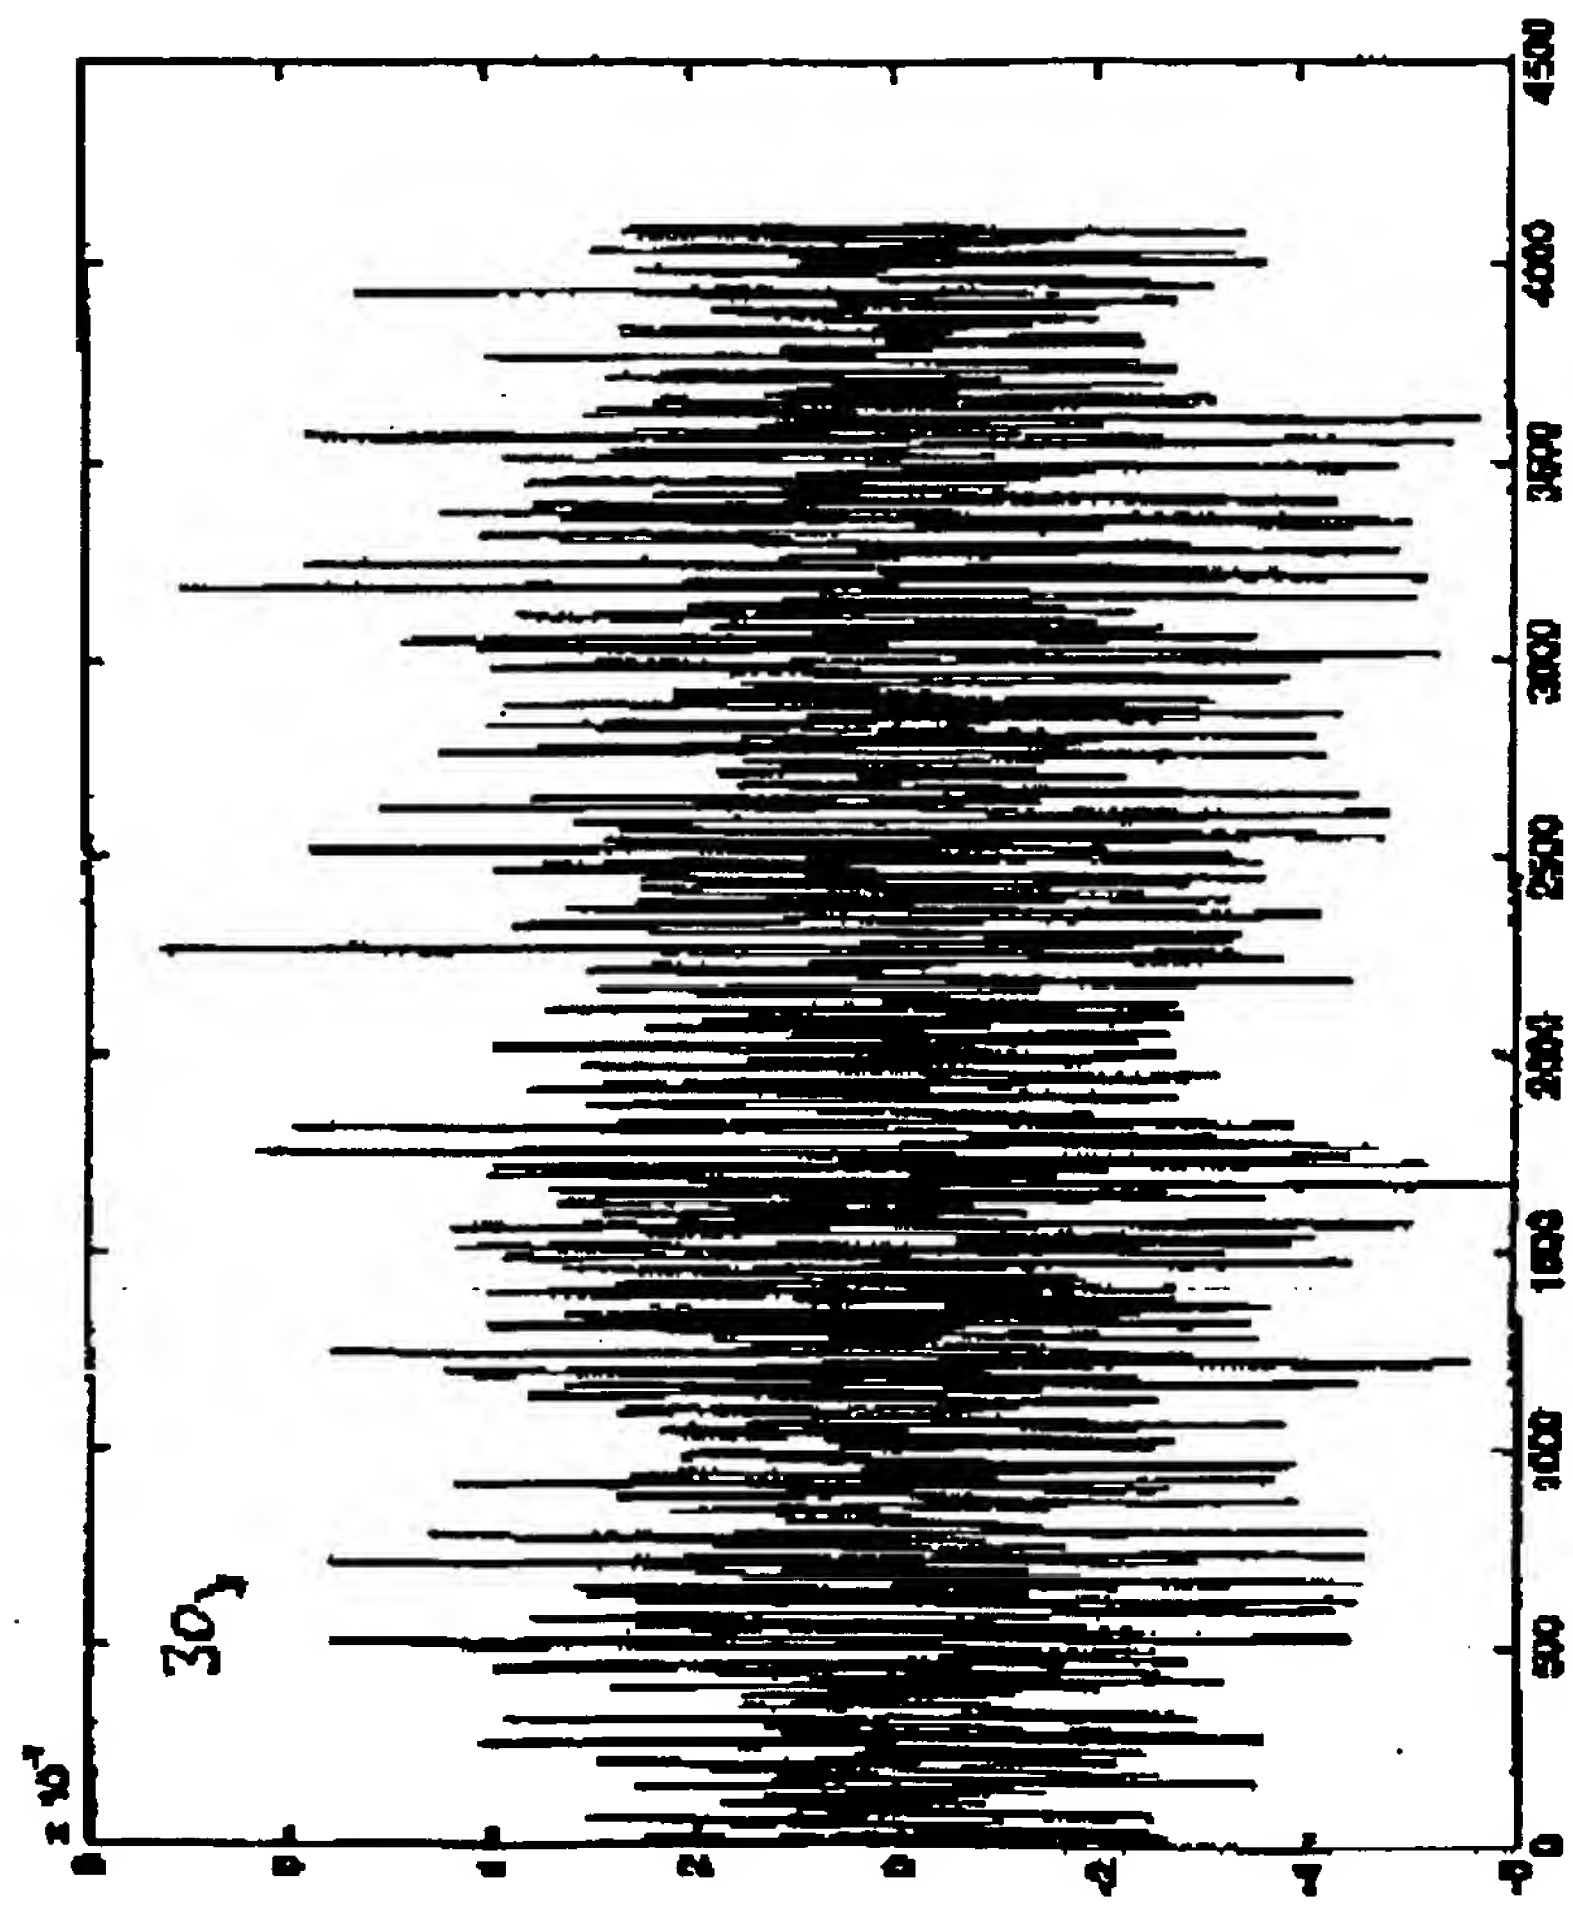

FIG 3

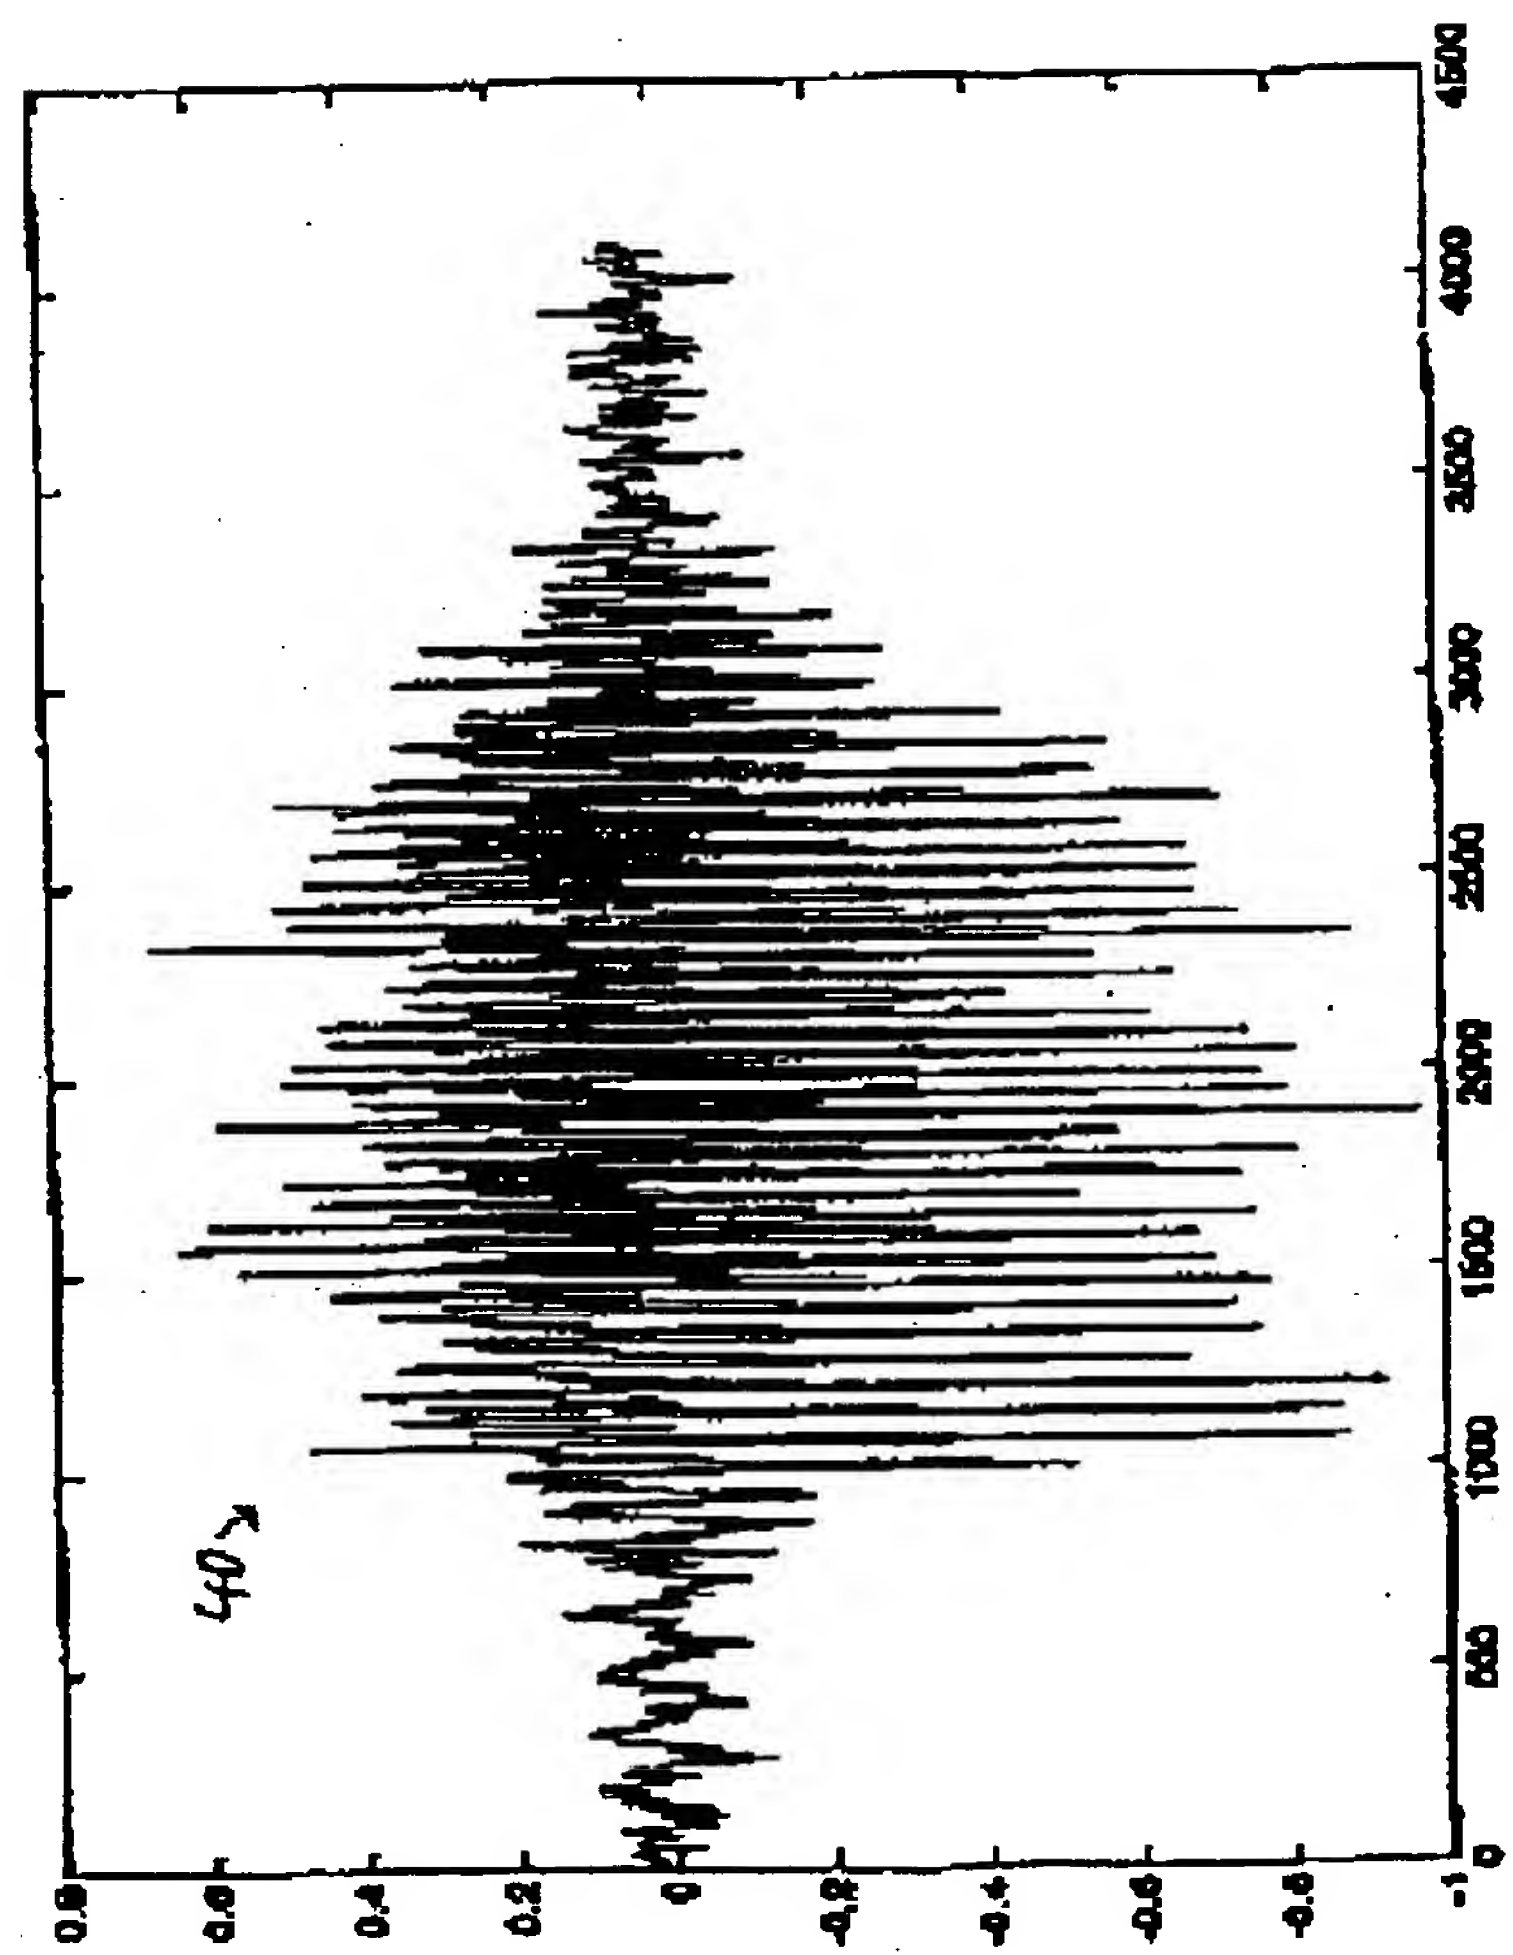
0.8
0.6
0.4
0.2
0
-0.2
-0.4
-0.6
-0.8
-1
0
500
1000
1500
2000
2500
3000
3500
4000
4500
40

FIG. 4

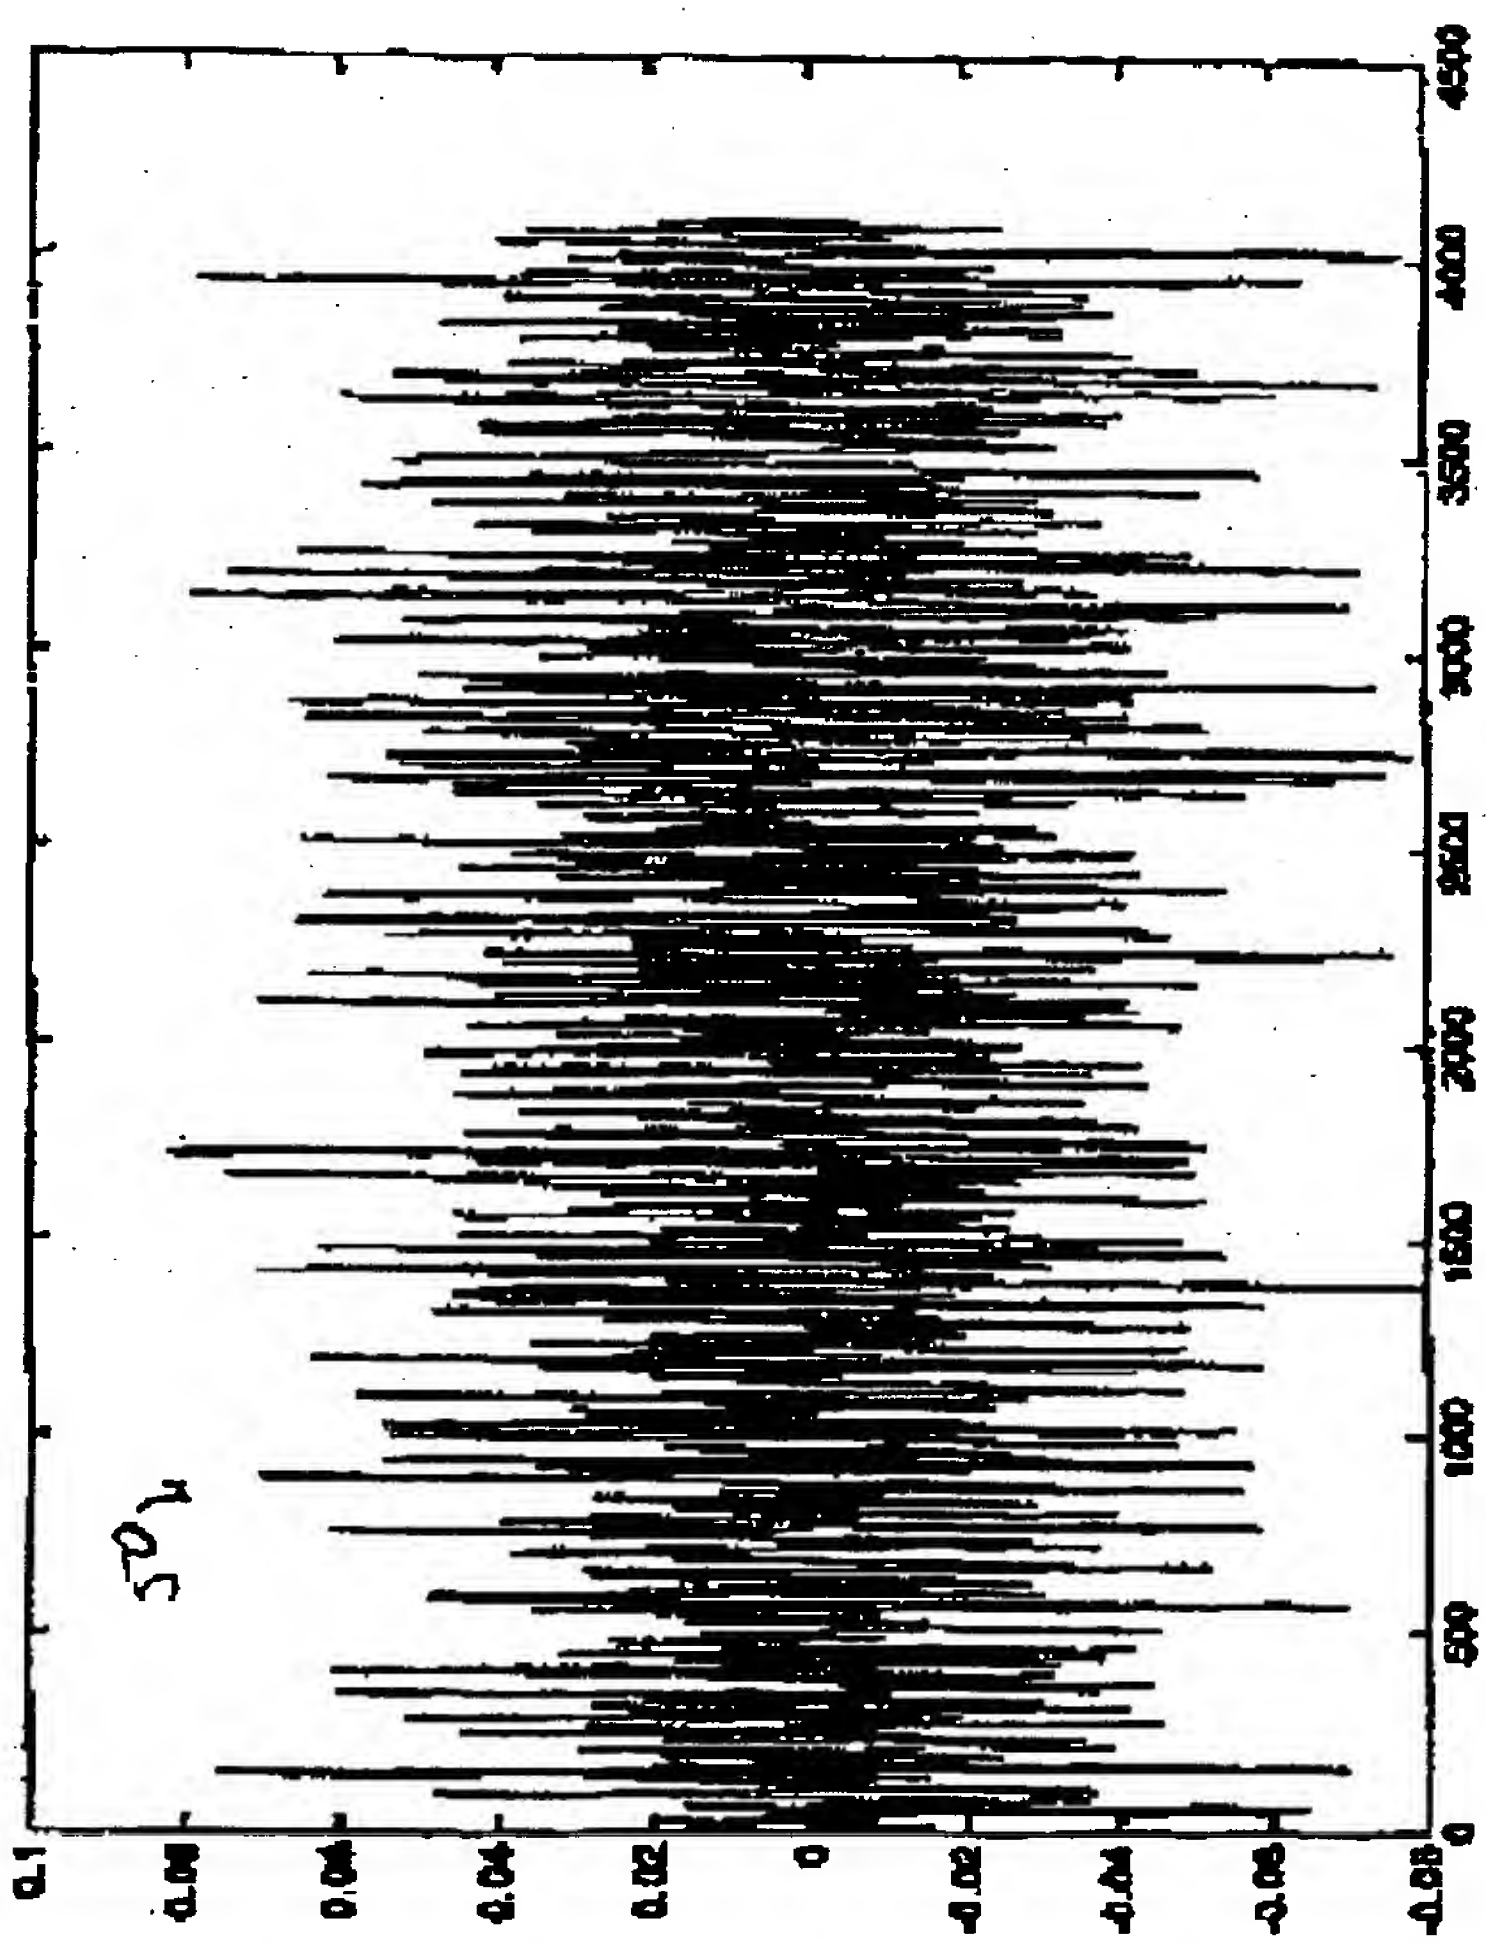
0.1
0.08
0.06
0.04
0.02
0
-0.02
-0.04
-0.06
-0.08
0
500
1000
1500
2000
2500
3000
3500
4000
4500

FIG. 5